

STM32 CubeMX

1. Description

1.1. Project

| | |
|-----------------|-------------------|
| Project Name | cube |
| Board Name | custom |
| Generated with: | STM32CubeMX 6.0.0 |
| Date | 10/18/2020 |


1.2. MCU

| | |
|----------------|---------------|
| MCU Series | STM32F1 |
| MCU Line | STM32F103 |
| MCU name | STM32F103VCTx |
| MCU Package | LQFP100 |
| MCU Pin number | 100 |

1.3. Core(s) information

| | |
|---------|---------------|
| Core(s) | Arm Cortex-M3 |
|---------|---------------|

2. Pinout Configuration

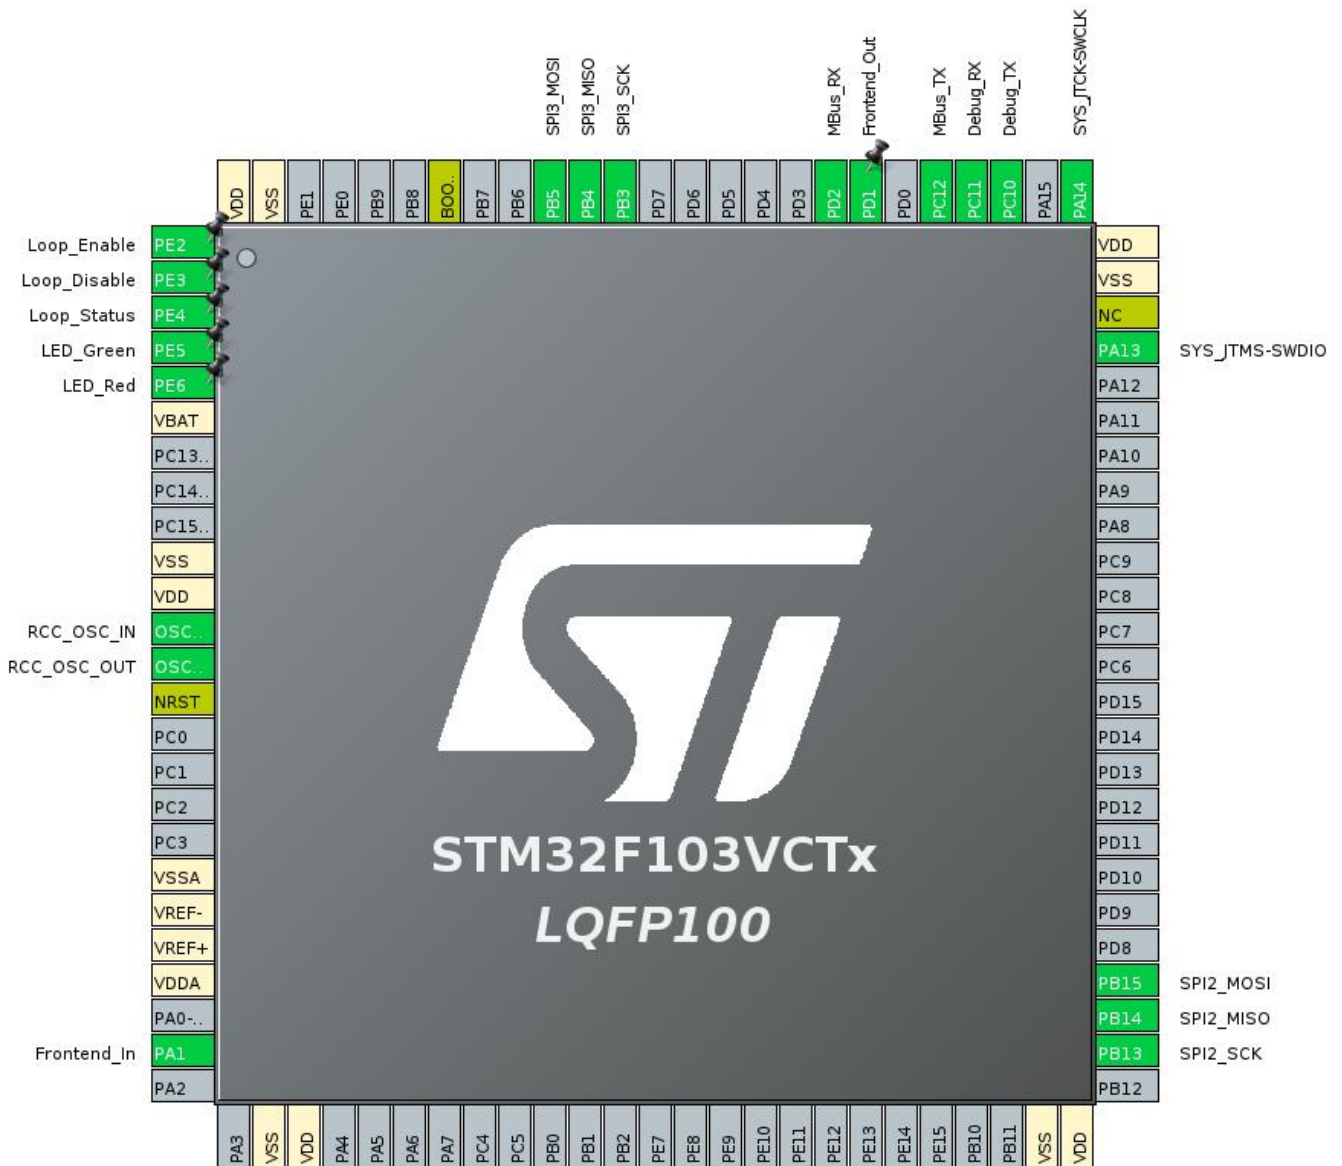


3. Pins Configuration

| Pin Number LQFP100 | Pin Name (function after reset) | Pin Type | Alternate Function(s) | Label |
|-----------------------|---------------------------------------|----------|--------------------------|--------------|
| 1 | PE2 * | I/O | GPIO_Output | Loop_Enable |
| 2 | PE3 * | I/O | GPIO_Output | Loop_Disable |
| 3 | PE4 * | I/O | GPIO_Input | Loop_Status |
| 4 | PE5 * | I/O | GPIO_Output | LED_Green |
| 5 | PE6 * | I/O | GPIO_Output | LED_Red |
| 6 | VBAT | Power | | |
| 10 | VSS | Power | | |
| 11 | VDD | Power | | |
| 12 | OSC_IN | I/O | RCC_OSC_IN | |
| 13 | OSC_OUT | I/O | RCC_OSC_OUT | |
| 14 | NRST | Reset | | |
| 19 | VSSA | Power | | |
| 20 | VREF- | Power | | |
| 21 | VREF+ | Power | | |
| 22 | VDDA | Power | | |
| 24 | PA1 | I/O | ADC1_IN1 | Frontend_In |
| 27 | VSS | Power | | |
| 28 | VDD | Power | | |
| 49 | VSS | Power | | |
| 50 | VDD | Power | | |
| 52 | PB13 | I/O | SPI2_SCK | |
| 53 | PB14 | I/O | SPI2_MISO | |
| 54 | PB15 | I/O | SPI2_MOSI | |
| 72 | PA13 | I/O | SYS_JTMS-SWDIO | |
| 73 | NC | NC | | |
| 74 | VSS | Power | | |
| 75 | VDD | Power | | |
| 76 | PA14 | I/O | SYS_JTCK-SWCLK | |
| 78 | PC10 | I/O | UART4_TX | Debug_TX |
| 79 | PC11 | I/O | UART4_RX | Debug_RX |
| 80 | PC12 | I/O | UART5_TX | MBus_TX |
| 82 | PD1 * | I/O | GPIO_Output | Frontend_Out |
| 83 | PD2 | I/O | UART5_RX | MBus_RX |
| 89 | PB3 | I/O | SPI3_SCK | |
| 90 | PB4 | I/O | SPI3_MISO | |
| 91 | PB5 | I/O | SPI3_MOSI | |

| Pin Number LQFP100 | Pin Name (function after reset) | Pin Type | Alternate Function(s) | Label |
|-----------------------|---------------------------------------|----------|--------------------------|-------|
| 94 | BOOT0 | Boot | | |
| 99 | VSS | Power | | |
| 100 | VDD | Power | | |

* The pin is affected with an I/O function

4. Clock Tree Configuration

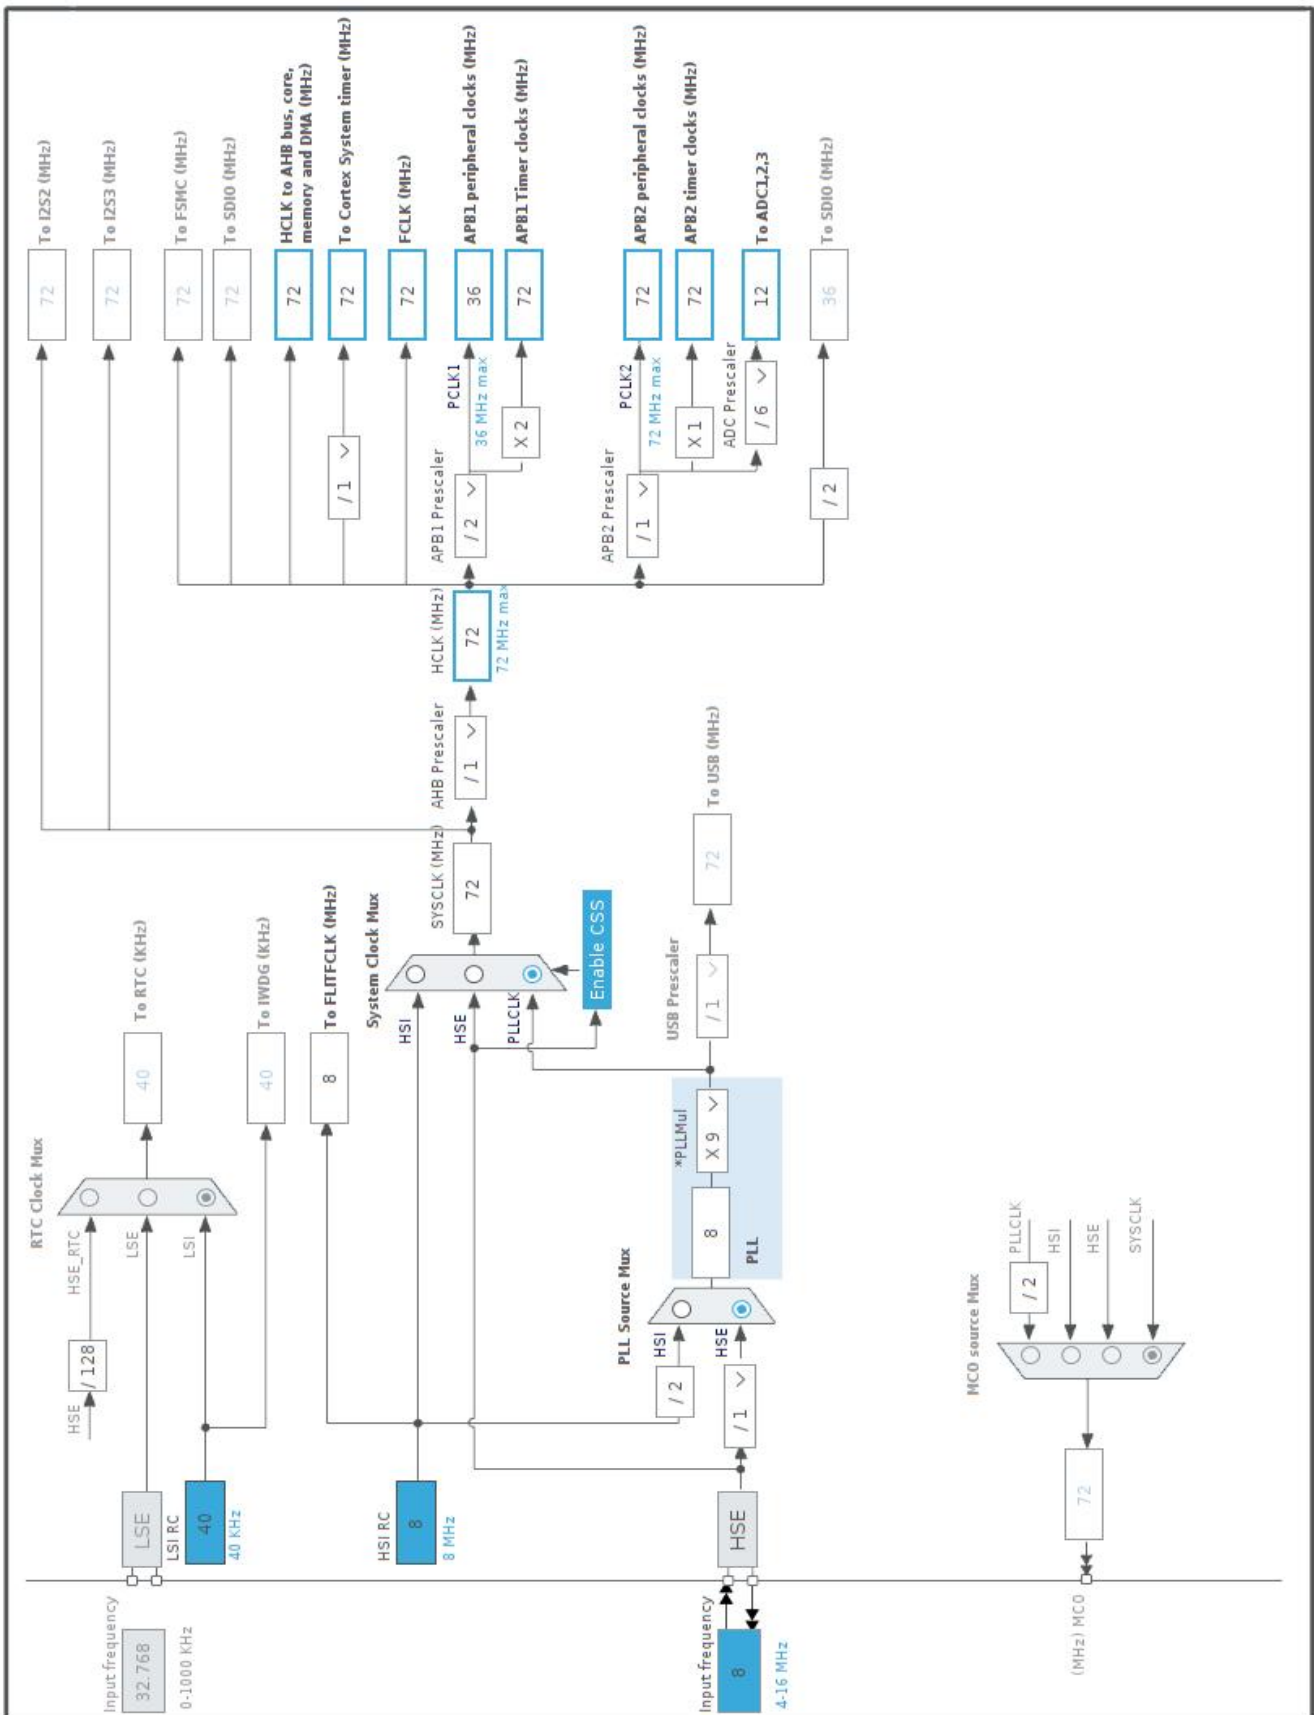

5. Software Project

5.1. Project Settings

| Name | Value |
|-----------------------------------|--|
| Project Name | cube |
| Project Folder | /home/wn/Workspaces/MBusGateway3Variant/cube |
| Toolchain / IDE | Makefile |
| Firmware Package Name and Version | STM32Cube FW_F1 V1.8.2 |
| Application Structure | Advanced |
| Generate Under Root | No |
| Do not generate the main() | No |
| Minimum Heap Size | 0x200 |
| Minimum Stack Size | 0x400 |

5.2. Code Generation Settings

| Name | Value |
|---|---------------------------------------|
| STM32Cube MCU packages and embedded software | Copy only the necessary library files |
| Generate peripheral initialization as a pair of '.c/.h' files | Yes |
| Backup previously generated files when re-generating | No |
| Keep User Code when re-generating | No |
| Delete previously generated files when not re-generated | Yes |
| Set all free pins as analog (to optimize the power consumption) | No |
| Enable Full Assert | No |

5.3. Advanced Settings - Generated Function Calls

| Rank | Function Name | IP Instance Name |
|------|--------------------|------------------|
| 1 | MX_GPIO_Init | GPIO |
| 2 | SystemClock_Config | RCC |
| 3 | MX_ADC1_Init | ADC1 |
| 4 | MX_SPI2_Init | SPI2 |
| 5 | MX_SPI3_Init | SPI3 |
| 6 | MX_UART4_Init | UART4 |
| 7 | MX_UART5_Init | UART5 |

6. Power Consumption Calculator report

6.1. Microcontroller Selection

| | |
|-----------|---------------|
| Series | STM32F1 |
| Line | STM32F103 |
| MCU | STM32F103VCTx |
| Datasheet | DS5792_Rev12 |

6.2. Parameter Selection

| | |
|-------------|-----|
| Temperature | 25 |
| Vdd | 3.3 |

6.3. Battery Selection

| | |
|-------------------|-----------------|
| Battery | Li-SOCL2(A3400) |
| Capacity | 3400.0 mAh |
| Self Discharge | 0.08 %/month |
| Nominal Voltage | 3.6 V |
| Max Cont Current | 100.0 mA |
| Max Pulse Current | 200.0 mA |
| Cells in series | 1 |
| Cells in parallel | 1 |


6.4. Sequence

| | | |
|-------------------------------|-------------|--------------|
| Step | Step1 | Step2 |
| Mode | RUN | STOP |
| Vdd | 3.3 | 3.3 |
| Voltage Source | Battery | Battery |
| Range | No Scale | No Scale |
| Fetch Type | FLASH | n/a |
| CPU Frequency | 72 MHz | 0 Hz |
| Clock Configuration | HSE PLL | Regulator LP |
| Clock Source Frequency | 8 MHz | 0 Hz |
| Peripherals | | |
| Additional Cons. | 0 mA | 0 mA |
| Average Current | 30.5 mA | 25 μ A |
| Duration | 0.1 ms | 0.9 ms |
| DMIPS | 90.0 | 0.0 |
| Ta Max | 100.37 | 105 |
| Category | In DS Table | In DS Table |

6.5. Results

| | | | |
|---------------|-------------------------------|-----------------|------------|
| Sequence Time | 1 ms | Average Current | 3.07 mA |
| Battery Life | 1 month, 15 days, 15 hours | Average DMIPS | 61.0 DMIPS |

6.6. Chart

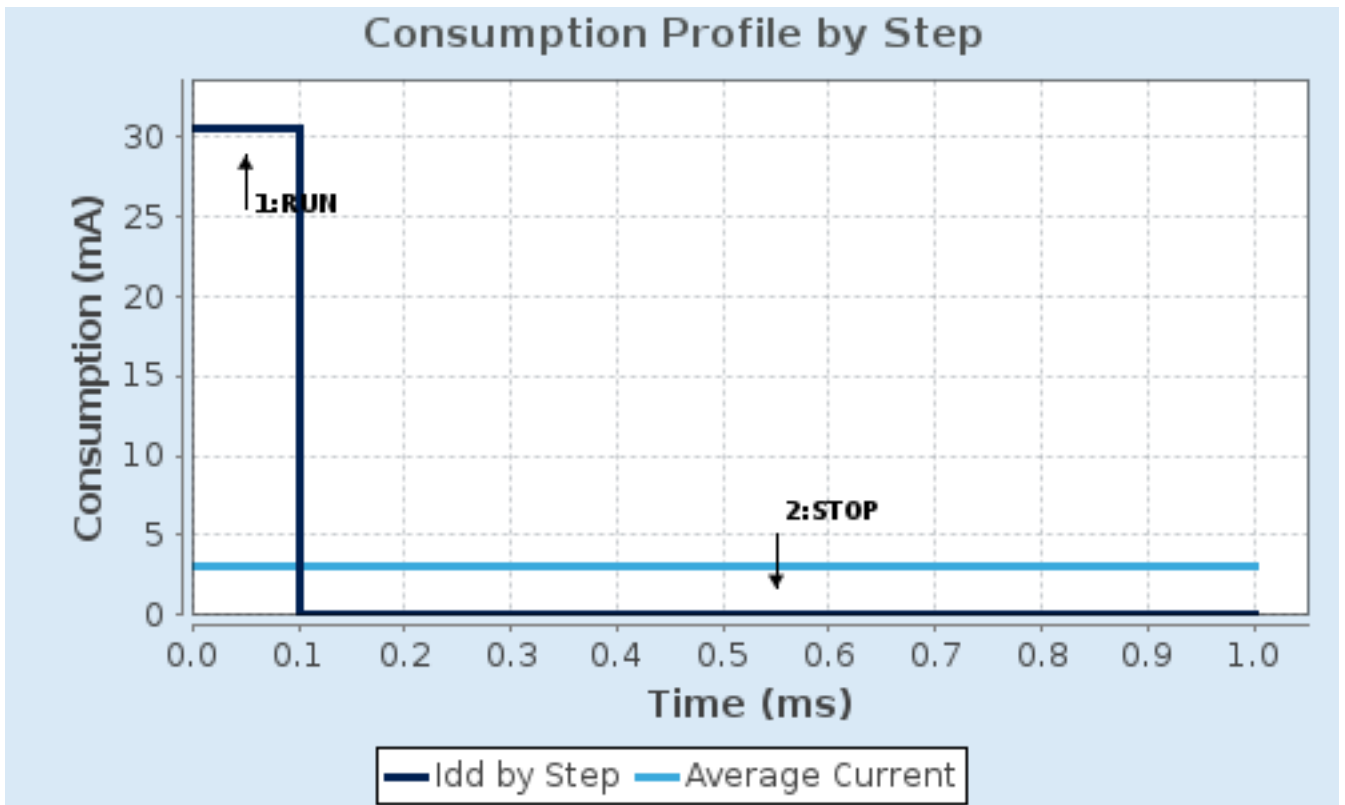

7. IPs and Middleware Configuration

7.1. ADC1

mode: IN1

7.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode Independent mode

ADC_Settings:

Data Alignment Right alignment

Scan Conversion Mode Disabled

Continuous Conversion Mode Disabled

Discontinuous Conversion Mode Disabled

ADC_Regular_ConversionMode:

Enable Regular Conversions Enable

Number Of Conversion 1

External Trigger Conversion Source Regular Conversion launched by software

Rank 1

Channel Channel 1

Sampling Time 1.5 Cycles

ADC_Injected_ConversionMode:

Enable Injected Conversions Disable

WatchDog:

Enable Analog WatchDog Mode false

7.2. GPIO

7.3. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

7.3.1. Parameter Settings:

System Parameters:

VDD voltage (V) 3.3

Prefetch Buffer Enabled

Flash Latency(WS) 2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value 16

HSE Startup Timeout Value (ms) 100

LSE Startup Timeout Value (ms) 5000

7.4. SPI2

Mode: Full-Duplex Master

7.4.1. Parameter Settings:

Basic Parameters:

Frame Format Motorola
Data Size 8 Bits
First Bit MSB First

Clock Parameters:

Prescaler (for Baud Rate) 2
Baud Rate **18.0 MBits/s ***
Clock Polarity (CPOL) Low
Clock Phase (CPHA) 1 Edge

Advanced Parameters:

CRC Calculation Disabled
NSS Signal Type Software

7.5. SPI3

Mode: Full-Duplex Master

7.5.1. Parameter Settings:

Basic Parameters:

Frame Format Motorola
Data Size 8 Bits
First Bit MSB First

Clock Parameters:

Prescaler (for Baud Rate) 2
Baud Rate **18.0 MBits/s ***
Clock Polarity (CPOL) Low
Clock Phase (CPHA) 1 Edge

Advanced Parameters:

CRC Calculation Disabled
NSS Signal Type Software

7.6. SYS

Debug: Serial Wire

Timebase Source: SysTick

7.7. UART4

Mode: Asynchronous

7.7.1. Parameter Settings:

Basic Parameters:

| | |
|-------------|---------------------------|
| Baud Rate | 115200 |
| Word Length | 8 Bits (including Parity) |
| Parity | None |
| Stop Bits | 1 |

Advanced Parameters:

| | |
|----------------|----------------------|
| Data Direction | Receive and Transmit |
| Over Sampling | 16 Samples |

7.8. UART5

Mode: Asynchronous

7.8.1. Parameter Settings:

Basic Parameters:

| | |
|-------------|---------------------------|
| Baud Rate | 2400 * |
| Word Length | 8 Bits (including Parity) |
| Parity | Even * |
| Stop Bits | 1 |

Advanced Parameters:

| | |
|----------------|----------------------|
| Data Direction | Receive and Transmit |
| Over Sampling | 16 Samples |

*** User modified value**

8. System Configuration

8.1. GPIO configuration

| IP | Pin | Signal | GPIO mode | GPIO pull/up pull down | Max Speed | User Label |
|-------|---------|----------------|------------------------------|-----------------------------|-----------|--------------|
| ADC1 | PA1 | ADC1_IN1 | Analog mode | n/a | n/a | Frontend_In |
| RCC | OSC_IN | RCC_OSC_IN | n/a | n/a | n/a | |
| | OSC_OUT | RCC_OSC_OUT | n/a | n/a | n/a | |
| SPI2 | PB13 | SPI2_SCK | Alternate Function Push Pull | n/a | High * | |
| | PB14 | SPI2_MISO | Input mode | No pull-up and no pull-down | n/a | |
| | PB15 | SPI2_MOSI | Alternate Function Push Pull | n/a | High * | |
| SPI3 | PB3 | SPI3_SCK | Alternate Function Push Pull | n/a | High * | |
| | PB4 | SPI3_MISO | Input mode | No pull-up and no pull-down | n/a | |
| | PB5 | SPI3_MOSI | Alternate Function Push Pull | n/a | High * | |
| SYS | PA13 | SYS_JTMS-SWDIO | n/a | n/a | n/a | |
| | PA14 | SYS_JTCK-SWCLK | n/a | n/a | n/a | |
| UART4 | PC10 | UART4_TX | Alternate Function Push Pull | n/a | High * | Debug_TX |
| | PC11 | UART4_RX | Input mode | No pull-up and no pull-down | n/a | Debug_RX |
| UART5 | PC12 | UART5_TX | Alternate Function Push Pull | n/a | High * | MBus_TX |
| | PD2 | UART5_RX | Input mode | No pull-up and no pull-down | n/a | MBus_RX |
| GPIO | PE2 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | Loop_Enable |
| | PE3 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | Loop_Disable |
| | PE4 | GPIO_Input | Input mode | No pull-up and no pull-down | n/a | Loop_Status |
| | PE5 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | LED_Green |
| | PE6 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | LED_Red |
| | PD1 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | Frontend_Out |

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

8.3.1. NVIC

| Interrupt Table | Enable | Preenmption Priority | SubPriority |
|---|--------|----------------------|-------------|
| Non maskable interrupt | true | 0 | 0 |
| Hard fault interrupt | true | 0 | 0 |
| Memory management fault | true | 0 | 0 |
| Prefetch fault, memory access fault | true | 0 | 0 |
| Undefined instruction or illegal state | true | 0 | 0 |
| System service call via SWI instruction | true | 0 | 0 |
| Debug monitor | true | 0 | 0 |
| Pendable request for system service | true | 0 | 0 |
| System tick timer | true | 0 | 0 |
| UART4 global interrupt | true | 0 | 0 |
| UART5 global interrupt | true | 0 | 0 |
| PVD interrupt through EXTI line 16 | | unused | |
| Flash global interrupt | | unused | |
| RCC global interrupt | | unused | |
| ADC1 and ADC2 global interrupts | | unused | |
| SPI2 global interrupt | | unused | |
| SPI3 global interrupt | | unused | |

8.3.2. NVIC Code generation

| Enabled interrupt Table | Select for init sequence ordering | Generate IRQ handler | Call HAL handler |
|---|-----------------------------------|----------------------|------------------|
| Non maskable interrupt | true | true | false |
| Hard fault interrupt | true | true | false |
| Memory management fault | true | true | false |
| Prefetch fault, memory access fault | true | true | false |
| Undefined instruction or illegal state | true | true | false |
| System service call via SWI instruction | true | true | false |
| Debug monitor | true | true | false |
| Pendable request for system service | true | true | false |
| System tick timer | true | true | true |
| UART4 global interrupt | true | true | true |
| UART5 global interrupt | true | true | true |

* User modified value

9. System Views

9.1. Category view

9.1.1. Current

Middleware

System Core

Analog

Timers

Connectivity

Multimedia

Computing

DMA

ADC1 

SPI2 

GPIO 

SPI3 

NVIC 

UART4 

RCC 

UART5 

SYS 

10. Docs & Resources

| Type | Link |
|--------------------|---|
| Datasheet | http://www.st.com/resource/en/datasheet/CD00191185.pdf |
| Reference manual | http://www.st.com/resource/en/reference_manual/CD00171190.pdf |
| Programming manual | http://www.st.com/resource/en/programming_manual/CD00228163.pdf |
| Programming manual | http://www.st.com/resource/en/programming_manual/CD00283419.pdf |
| Errata sheet | http://www.st.com/resource/en/errata_sheet/CD00197763.pdf |
| Application note | http://www.st.com/resource/en/application_note/CD00160362.pdf |
| Application note | http://www.st.com/resource/en/application_note/CD00164185.pdf |
| Application note | http://www.st.com/resource/en/application_note/CD00167594.pdf |
| Application note | http://www.st.com/resource/en/application_note/CD00200423.pdf |
| Application note | http://www.st.com/resource/en/application_note/CD00211314.pdf |
| Application note | http://www.st.com/resource/en/application_note/CD00249778.pdf |
| Application note | http://www.st.com/resource/en/application_note/CD00259245.pdf |
| Application note | http://www.st.com/resource/en/application_note/CD00264321.pdf |
| Application note | http://www.st.com/resource/en/application_note/CD00264342.pdf |
| Application note | http://www.st.com/resource/en/application_note/CD00264379.pdf |
| Application note | http://www.st.com/resource/en/application_note/DM00024853.pdf |
| Application note | http://www.st.com/resource/en/application_note/DM00032987.pdf |
| Application note | http://www.st.com/resource/en/application_note/DM00033267.pdf |
| Application note | http://www.st.com/resource/en/application_note/DM00033344.pdf |
| Application note | http://www.st.com/resource/en/application_note/DM00042534.pdf |
| Application note | http://www.st.com/resource/en/application_note/DM00052530.pdf |
| Application note | http://www.st.com/resource/en/application_note/DM00073742.pdf |
| Application note | http://www.st.com/resource/en/application_note/DM00080497.pdf |
| Application note | http://www.st.com/resource/en/application_note/DM00129215.pdf |

Application note http://www.st.com/resource/en/application_note/DM00160482.pdf
Application note http://www.st.com/resource/en/application_note/DM00156964.pdf
Application note http://www.st.com/resource/en/application_note/DM00209695.pdf
Application note http://www.st.com/resource/en/application_note/DM00220769.pdf
Application note http://www.st.com/resource/en/application_note/DM00257177.pdf
Application note http://www.st.com/resource/en/application_note/DM00272912.pdf
Application note http://www.st.com/resource/en/application_note/DM00236305.pdf
Application note http://www.st.com/resource/en/application_note/DM00296349.pdf
Application note http://www.st.com/resource/en/application_note/DM00325582.pdf
Application note http://www.st.com/resource/en/application_note/DM00327191.pdf
Application note http://www.st.com/resource/en/application_note/DM00354244.pdf
Application note http://www.st.com/resource/en/application_note/DM00315319.pdf
Application note http://www.st.com/resource/en/application_note/DM00380469.pdf
Application note http://www.st.com/resource/en/application_note/DM00395696.pdf
Application note http://www.st.com/resource/en/application_note/DM00493651.pdf
Application note http://www.st.com/resource/en/application_note/DM00536349.pdf